


- 90% DOD
- 99% Faradic charge efficiency
- Cycle life > 6000 times

- Secondary Protection by hardware
- IP55 protection level
- Safety & Reliability

- Safety & Reliability
- Floor or wall mounting

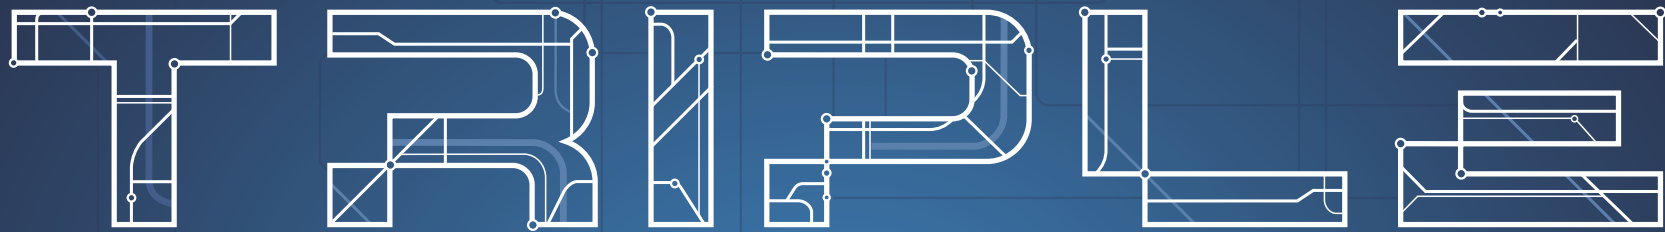


POWER




[www.solarbright.com.au](http://www.solarbright.com.au) – Ph 1300 852 622


# TRIPLE POWER



Master Box  
MC0500  
461\*189\*105mm



Battery Module  
T45(HV10040)/T63(HV10056)  
464\*193\*588mm



Master Box HV  
Battery module(s)  
464\*193\*693mm

## T-BAT SYS-HV Configuration List

System	Master Box	Battery Module	Voltage (V)
4.6kWh	1	T45*1	85-118
9.2kWh	1	T45*2	170-236
13.8kWh	1	T45*3	255-354
18.4kWh	1	T45*4	340-472
6.5kWh	1	T63*1	85-118
13kWh	1	T63*2	170-236
19.5kWh	1	T63*3	255-354
26kWh	1	T63*4	340-472

\*The Triple power contains Master BMS Box. Up to 4 batteries can be connected for a total of 26kWh. Differently sized battery modules are not compatible.

	MASTER BOX	T45	T63
Nominal Voltage(Vdc)	/	100.8	100.8
Operating Voltage(Vdc):	70-500	85-118	85-118
Nominal Capacity(kWh):	/	4.5	6.3
Max. charge/discharge Current(A) :	30	30	30
Recommend Charge/Discharge Current (A):	25	25	25
Standard Power(kW)	/	2.5	2.5
Maximum Power(kW)	/	3	3
Dimension (mm)	461*189*105	464*193*588	464*193*588
Weight (kg)	5.7	56.6	67.5
Faradic Charge Efficiency(25°C/77°F) (%)		99	
Battery Roundtrip Efficiency(C/3,25°C/77°F) (%)		95	
Cycle life(100% DOD,25°C/77°F)		6000	
Available Operating Temperature (°C)		-10--45	
Optimal Operating Temperature (°C)		15--30	
Ingress Protection		IP55	
Scalability		Up to 4 modules(HV10040/10056)	
Warranty(year)		10	
Certifications	T-BAT system safety	CE, FCC, RCM, TUV (IEC 62619), UL 1973	
	Battery cell safety	UL 1642	
	UN number	UN 3480	
	Hazardous materials classification	Class 9	
	UN transportation testing requirements	UN 38.3	